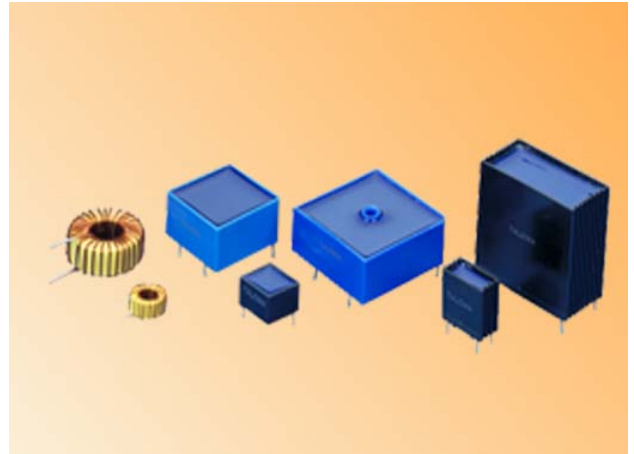


SA Series • High Efficiency • High Stability Storage Chokes

SA Series storage chokes have been designed with Fe-based amorphous alloy which provides high flux density and low core loss which is ideal for optimizing choke design. Providing exceptional efficiency and field modulation when used as loading coils for interim energy storage with SMPS, the use of amorphous cores gives a highly stable inductance over a wide DC bias current range and high "Q" with operating frequencies upto 500KHz.

Features

- Fe-based amorphous alloy cores
- Operating frequencies upto 500KHz
- Small size and high "Q"
- Highly stable inductance with changing DC bias current
- Low temperature rise
- Fully encapsulated styles available meeting class GFK (-40°C to +125°C, humidity class F) as per DIN 40040
- Manufactured in ISO 9001:2015 and ISO 14001:2015 certified Talema facility
- Fully RoHS & REACH Compliant


Electrical Specifications @25°C

Test frequency: Inductance measured @10KHz / 100mV
 Test voltage between windings: 500Vrms
 Operating temperature: -40°C to +125°C
 Climatic category: IEC68-1 40/125/56

Part Number	I _{DC} Amps	L (µH) Typ. @ Rated Current	L _O (µH) ±25% No Load	DCR mOhms Typical	Energy Storage (µJ) *	Schematic	Coil Size O.D. x Ht. (a x b)	Housing Size Code		Mounting Style (Terminal Ød)		
								F	V	O	F	V
SA_-0.63-22	0.63	22	23	95	4	1	12 x 8	17	20	0.355	0.60	0.80
SA_-0.63-33		33	35	118	7	1	12 x 8	17	20	0.355	0.60	0.80
SA_-0.63-47		47	49	141	10	1	13 x 9	17	20	0.355	0.60	0.80
SA_-0.63-68		68	70	167	13	1	13 x 9	17	20	0.355	0.60	0.80
SA_-0.63-100		100	105	206	20	1	13 x 9	17	20	0.355	0.60	0.80
SA_-0.63-150		150	157	276	29	1	13 x 9	17	20	0.335	0.60	0.80
SA_-0.63-220		220	248	348	44	1	14 x 9	17	20	0.335	0.60	0.80
SA_-0.63-330		330	389	436	65	1	14 x 9	17	20	0.335	0.60	0.80
SA_-0.63-470		470	480	421	92	1	16 x 8	22	20	0.335	0.60	0.80
SA_-0.63-680		680	728	519	136	1	17 x 9	22	25	0.335	0.60	0.80
SA_-0.63-1000		1000	1105	639	197	1	17 x 9	22	25	0.335	0.60	0.80
SA_-0.63-1500		1500	1523	801	299	1	22 x 8	29	30	0.335	0.60	0.80
SA_-0.63-2200		2200	2249	974	437	1	23 x 9	29	30	0.335	0.60	0.80
SA_-0.63-3300		3300	3514	1217	655	1	24 x 10	29	30	0.335	0.60	0.80
SA_-0.63-4700		4700	5345	1501	933	1	24 x 10	29	30	0.335	0.60	0.80
SA_-0.63-6800		6800	6949	2003	1351	1	27 x 16	32	35	0.335	0.60	0.80
SA_-0.63-8200		8200	9057	2287	1618	1	28 x 17	32	40	0.335	0.60	0.80
SA_-1.0-22		1.0	22	23	59	11	1	12 x 8	17	20	0.450	0.60
SA_-1.0-33	33		35	73	17	1	12 x 8	17	20	0.450	0.60	0.80
SA_-1.0-47	47		49	88	23	1	13 x 9	17	25	0.450	0.60	0.80
SA_-1.0-68	68		73	107	34	1	13 x 9	17	25	0.450	0.60	0.80
SA_-1.0-100	100		102	110	51	1	16 x 9	22	25	0.450	0.60	0.80
SA_-1.0-150	150		151	134	74	1	16 x 9	22	25	0.450	0.60	0.80
SA_-1.0-220	220		230	165	110	1	16 x 9	22	25	0.450	0.60	0.80
SA_-1.0-330	330		362	207	167	1	18 x 10	22	25	0.450	0.60	0.80
SA_-1.0-470	470		472	252	236	1	22 x 9	29	25	0.450	0.60	0.80
SA_-1.0-680	680		698	307	342	1	24 x 10	29	25	0.450	0.60	0.80
SA_-1.0-1000	1000		1031	373	500	1	24 x 10	29	30	0.450	0.60	0.80
SA_-1.0-1500	1500		1641	470	746	1	24 x 10	29	30	0.450	0.60	0.80
SA_-1.0-2200	2200		2589	591	1100	1	25 x 11	29	30	0.450	0.60	0.80
SA_-1.0-3300	3300		3359	788	1646	1	28 x 17	32	40	0.450	0.60	0.80
SA_-1.0-4700	4700		4968	958	2360	1	28 x 17	32	40	0.450	0.60	0.80
SA_-1.0-6800	6800		8000	1215	3400	1	29 x 18	32	40	0.450	0.60	0.80

Talema's engineering staff can assist in the design of other inductance values and sizes.

SA Series • High Efficiency • High Stability Storage Chokes

Electrical Specifications @25°C

Part Number	I _{DC} Amps	L (µH) Typ. @ Rated Current	L ₀ (µH) ±25% No Load	DCR mOhms Typical	Energy Storage (µJ) *	Schematic	Coil Size O.D. x Ht. (a x b)	Housing Size Code		Mounting Style Terminal Ød		
								F	V	O	F	V
SA_-1.6-22	1.6	22	23	38	27	1	13 x 8	17	20	0.560	0.560	0.800
SA_-1.6-33		33	27	49	42	1	14x 9	17	25	0.560	0.560	0.800
SA_-1.6-47		47	55	60	59	1	14 x 9	17	25	0.560	0.560	0.800
SA_-1.6-68		68	67	57	84	1	17 x 9	22	25	0.560	0.560	0.800
SA_-1.6-100		100	107	73	130	1	17 x 9	22	25	0.560	0.560	0.800
SA_-1.6-150		150	169	91	195	1	17 x 9	22	25	0.560	0.560	0.800
SA_-1.6-220		220	268	115	278	1	18 x 11	22	25	0.560	0.560	0.800
SA_-1.6-330		330	343	139	426	1	23 x 9	29	25	0.560	0.560	0.800
SA_-1.6-470		470	516	170	608	1	23 x 9	29	25	0.560	0.560	0.800
SA_-1.6-680		680	765	207	872	1	24 x 11	29	30	0.560	0.560	0.800
SA_-1.6-1000		1000	1300	165	1272	1	27 x 16	32	35	0.560	0.560	0.800
SA_-1.6-1500		1500	1549	345	1923	1	27 x 16	32	35	0.560	0.560	0.800
SA_-1.6-2200		2200	2402	430	2929	1	28 x 17	32	40	0.560	0.560	0.800
SA_-1.6-3300		3300	3458	565	4205	1	33 x 17	42	40	0.560	0.560	0.800
SA_-1.6-4700		4700	4968	718	6041	1	43 x 16	49	45	0.560	0.560	0.800
SA_-1.6-5600	5600	6216	804	7161	1	45 x 18	49	--	0.560	0.560	--	
SA_-2.0-22	2.0	22	23	27	46	1	15 x 8	17	20	0.630	0.630	0.630
SA_-2.0-33		33	33	32	65	1	15 x 8	17	20	0.630	0.630	0.630
SA_-2.0-47		47	49	39	83	1	15 x 8	17	20	0.630	0.630	0.630
SA_-2.0-68		68	75	48	137	1	15 x 8	17	20	0.630	0.630	0.630
SA_-2.0-100		100	112	59	200	1	16 x 9	22	20	0.630	0.630	0.630
SA_-2.0-150		150	195	76	302	1	16 x 9	22	20	0.630	0.630	0.630
SA_-2.0-220		220	234	91	446	1	23 x 10	29	30	0.630	0.630	0.630
SA_-2.0-330		330	362	113	658	1	25 x 11	29	30	0.630	0.630	0.630
SA_-2.0-470		470	551	139	947	1	25 x 11	29	30	0.630	0.630	0.630
SA_-2.0-680		680	701	184	1374	1	27 x 16	32	35	0.630	0.630	0.630
SA_-2.0-1000		1000	1060	226	2014	1	29 x 18	32	40	0.630	0.630	0.630
SA_-2.0-1500		1500	1693	285	3013	1	29 x 17	32	40	0.630	0.630	0.630
SA_-2.0-2200		2200	2500	379	4401	1	35 x 19	49	45	0.630	0.630	0.630
SA_-2.0-3300		3300	3594	483	6612	1	46 x 19	49	--	0.630	0.630	--
SA_-2.0-3900		3900	4567	544	7855	1	46 x 19	49	--	0.630	0.630	--
SA_-2.5-22	2.5	22	23	23	70	1	16 x 8	22	20	0.670	0.670	0.670
SA_-2.5-33		33	33	28	101	1	16 x 8	22	20	0.670	0.670	0.670
SA_-2.5-47		47	52	35	150	1	18 x 10	22	25	0.670	0.670	0.670
SA_-2.5-68		68	75	42	209	1	18 x 10	22	25	0.670	0.670	0.670
SA_-2.5-100		100	123	53	307	1	18 x 10	22	25	0.670	0.670	0.670
SA_-2.5-150		150	159	65	476	1	23 x 10	32	30	0.670	0.670	0.670
SA_-2.5-220		220	242	80	688	1	23 x 10	32	30	0.670	0.670	0.670
SA_-2.5-330		330	381	100	1023	1	23 x 10	32	30	0.670	0.670	0.670
SA_-2.5-470		470	476	131	1459	1	27 x 16	32	35	0.670	0.670	0.670
SA_-2.5-680		680	720	161	2138	1	27 x 16	32	35	0.670	0.670	0.670
SA_-2.5-1000		1000	1107	200	3114	1	29 x 18	32	40	0.670	0.670	0.670
SA_-2.5-1500		1500	1786	278	4743	1	34 x 18	42	40	0.670	0.670	0.670
SA_-2.5-2200		2200	2441	345	6867	1	43 x 16	49	--	0.670	0.670	--
SA_-2.5-2700		2700	3295	401	8444	1	43 x 16	49	--	0.670	0.670	--
SA_-3.15-22		3.15	22	23	19	107	1	16 x 8	22	20	0.750	0.750
SA_-3.15-33	33		36	24	164	1	18 x 10	22	25	0.750	0.750	0.750
SA_-3.15-47	47		56	29	238	1	18 x 10	22	25	0.750	0.750	0.750
SA_-3.15-68	68		71	35	346	1	22 x 8	29	25	0.750	0.750	0.750
SA_-3.15-100	100		103	42	488	1	24 x 10	29	30	0.750	0.750	0.750
SA_-3.15-150	150		165	54	736	1	24 x 10	29	30	0.750	0.750	0.750
SA_-3.15-220	220		266	68	1107	1	24 x 10	29	30	0.750	0.750	0.750
SA_-3.15-330	330		333	89	1619	1	28 x 17	32	40	0.750	0.750	0.750
SA_-3.15-470	470		492	108	2319	1	28 x 17	32	40	0.750	0.750	0.750
SA_-3.15-680	680		799	138	3369	1	28 x 17	32	40	0.750	0.750	0.750
SA_-3.15-1000	1000		1265	190	5020	1	35 x 19	42	40	0.750	0.750	0.750
SA_-3.15-1500	1500		1656	231	7393	1	44 x 17	49	--	0.750	0.750	--

When Ordering, use suffix "O", "F" or "V" to designate desired package style.

Example: SAO for Open, SAV for Vertical and SAF for Flat Mount

SA Series • High Efficiency • High Stability Storage Chokes

Electrical Specifications @25°C


Part Number	I _{DC} Amps	L (μH) Typ. @ Rated Current	L _O (μH) ±25% No Load	DCR mOhms Typical	Energy Storage (μJ) *	Schematic	Coil Size O.D. x Ht. (a x b)	Housing Size Code		Mounting Style Terminal Ød		
								F	V	O	F	V
SA_-4.0-22	4.0	22	23	15	165	1	16 X 8	22	20	0.850	0.850	0.850
SA_-4.0-33		33	39	19	260	1	18 x 11	22	25	0.850	0.850	0.850
SA_-4.0-47		47	48	22	375	1	22 x 9	29	25	0.850	0.850	0.850
SA_-4.0-68		68	75	28	556	1	24 x 11	29	30	0.850	0.850	0.850
SA_-4.0-100		100	113	35	812	1	24 x 11	29	30	0.850	0.850	0.850
SA_-4.0-150		150	157	48	1242	1	26 x 15	32	35	0.850	0.850	0.850
SA_-4.0-220		220	226	57	1752	1	28 x 17	32	40	0.850	0.850	0.850
SA_-4.0-330		330	360	72	2646	1	28 x 17	32	40	0.850	0.850	0.850
SA_-4.0-400		400	476	83	3239	1	28 x 17	32	40	0.850	0.850	0.850
SA_-4.0-470		470	508	94	3738	1	33 x 17	42	40	0.850	0.850	0.850
SA_-4.0-680	680	703	117	5515	1	44 x 17	49	--	0.850	0.850	--	
SA_-4.0-1000	1000	1191	153	8006	1	44 x 17	49	--	0.850	0.850	--	
SA_-5.0-22	5.0	22	28	13	281	1	19 x 11	22	25	0.950	0.950	0.950
SA_-5.0-33		33	35	15	430	1	22 x 9	29	25	0.950	0.950	0.950
SA_-5.0-47		47	51	19	596	1	22 x 9	29	25	0.950	0.950	0.950
SA_-5.0-68		68	75	23	831	1	25 x 11	29	30	0.950	0.950	0.950
SA_-5.0-100		100	100	31	1242	1	26 x 15	32	35	0.950	0.950	0.950
SA_-5.0-150		150	157	38	1882	1	26 x 15	32	35	0.950	0.950	0.950
SA_-5.0-220		220	237	47	2722	1	29 x 18	32	40	0.950	0.950	0.950
SA_-5.0-330		330	362	63	4068	1	34 x 18	42	40	0.950	0.950	0.950
SA_-5.0-470		470	492	78	5955	1	42 x 15	49	45	0.950	0.950	0.950
SA_-5.0-630		630	703	94	7914	1	45 x 18	49	--	0.950	0.950	--
SA_-5.0-680	680	845	103	8554	1	45 x 18	49	--	0.950	0.950	--	
SA_-6.3-22	6.3	22	24	9	450	1	23 x 9	29	25	1.120	1.120	1.120
SA_-6.3-33		33	35	11	635	1	23 x 9	29	25	1.120	1.120	1.120
SA_-6.3-47		47	55	14	959	1	26 x 12	29	30	1.120	1.120	1.120
SA_-6.3-68		68	68	18	1317	1	27 x 16	32	35	1.120	1.120	1.120
SA_-6.3-100		100	108	23	2051	1	27 x 16	32	35	1.120	1.120	1.120
SA_-6.3-150		150	166	28	2963	1	30 x 19	32	40	1.120	1.120	1.120
SA_-6.3-220		220	251	38	4435	1	35 x 19	42	40	1.120	1.120	1.120
SA_-6.3-330		330	357	48	6587	1	43 x 16	49	45	1.120	1.120	1.120
SA_-6.3-390	390	459	55	7842	1	46 x 19	49	--	1.120	1.120	--	
SA_-8.0-22	8.0	22	24	7	695	1	23 x 10	29	30	1.250	1.250	1.250
SA_-8.0-33		33	38	9	1037	1	26 x 13	29	30	1.250	1.250	1.250
SA_-8.0-47		47	47	12	1434	1	27 x 16	32	35	1.250	1.250	1.250
SA_-8.0-68		68	74	15	2241	1	27 x 16	32	35	1.250	1.250	1.250
SA_-8.0-100		100	123	20	3188	1	30 x 19	32	40	1.250	1.250	1.250
SA_-8.0-150		150	179	26	4698	1	35 x 19	42	40	1.250	1.250	1.250
SA_-8.0-220		220	244	32	7107	1	43 x 16	49	45	1.250	1.250	1.250
SA_-8.0-270		270	330	37	8554	1	46 x 19	49	--	1.250	1.250	--
SA_-10-22	10	22	22	7	1060	1	27 x 16	32	40	1.320	1.320	1.320
SA_-10-33		33	33	9	1589	1	27 x 16	32	40	1.320	1.320	1.320
SA_-10-47		47	51	11	2406	1	27 x 16	32	40	1.320	1.320	1.320
SA_-10-68		68	80	14	3280	1	27 x 16	32	40	1.320	1.320	1.320
SA_-10-100		100	127	19	5079	1	34 x 18	42	40	1.320	1.320	1.320
SA_-10-150		150	171	24	7442	1	43 x 16	49	--	1.320	1.320	--
SA_-10-180		180	233	27	8876	1	43 x 16	49	--	1.320	1.320	--
SA_-16-22	16	22	29	5	2986	2P	30 x 19	32	40	1.180	1.180	1.180
SA_-16-33		33	36	6	4128	2P	35 x 19	42	40	1.180	1.180	1.180
SA_-16-47		47	70	10	7150	2P	43 x 16	49	45	1.180	1.180	1.180
SA_-16-68		68	83	10	8554	2P	43 x 16	49	45	1.180	1.180	1.180
SA_-20-10	20	10	10	3	2011	2P	27 x 16	32	40	1.320	1.320	1.320
SA_-20-22		22	24	4	4278	2P	32 x 16	42	40	1.320	1.320	1.320
SA_-20-33		33	38	6	6867	2P	43 x 16	49	--	1.320	1.320	--
SA_-20-47		47	53	7	8976	2P	43 x 16	49	--	1.320	1.320	--

Notes:


- 1) The μJoule rating ($\frac{1}{2}LI^2$) is the ability of the inductor to store energy.
- 2) Schematic: 1 = One Winding; 2P = Two Windings, Parallel Connection.
- 3) Inductance measured @10KHz / 0.10Vrms without DC Current, @10KHz / 0.25Vrms with DC Current.
- 4) On larger units and units wound with finer wire additional mechanical mounting is recommended. See next page for Mounting Options.

Mounting Styles • SA Series • High Efficiency - High Stability Storage Chokes


Mounting Style "V"

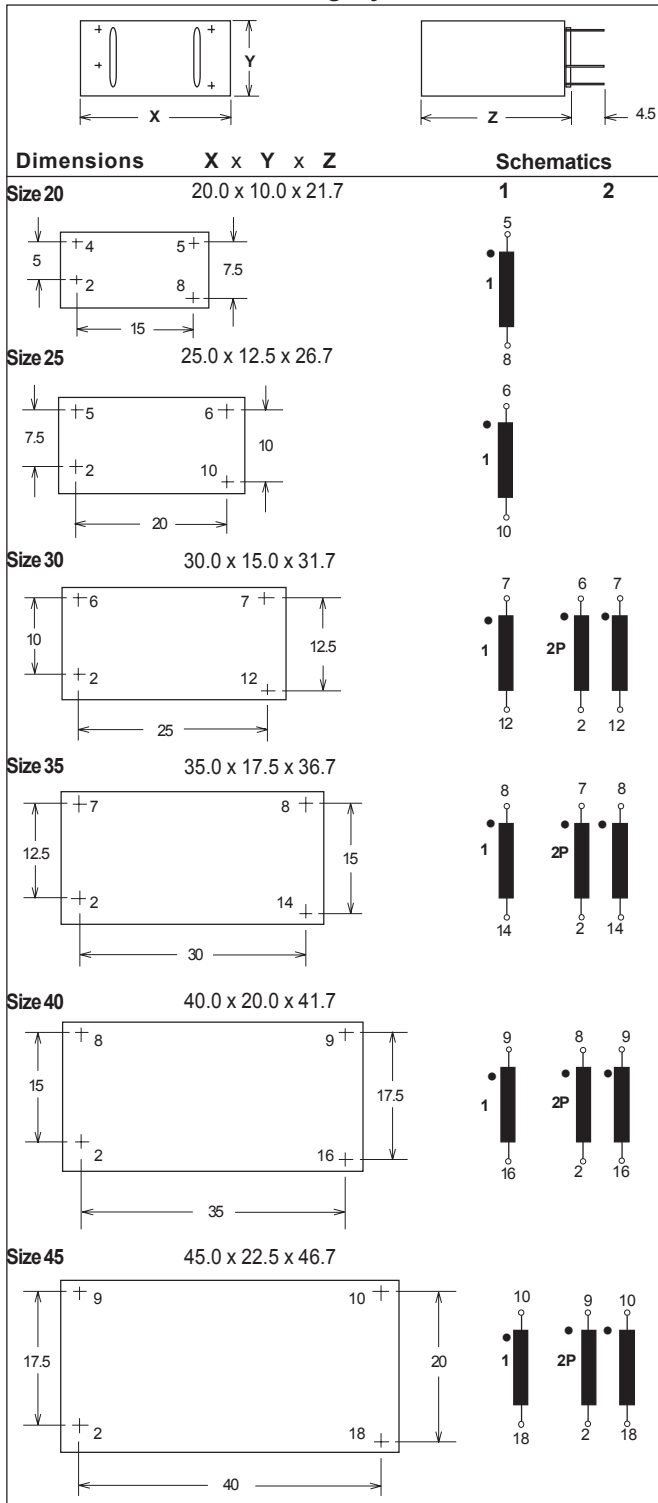

Mounting Style 'O' = Open Mount



Mounting Style "F"

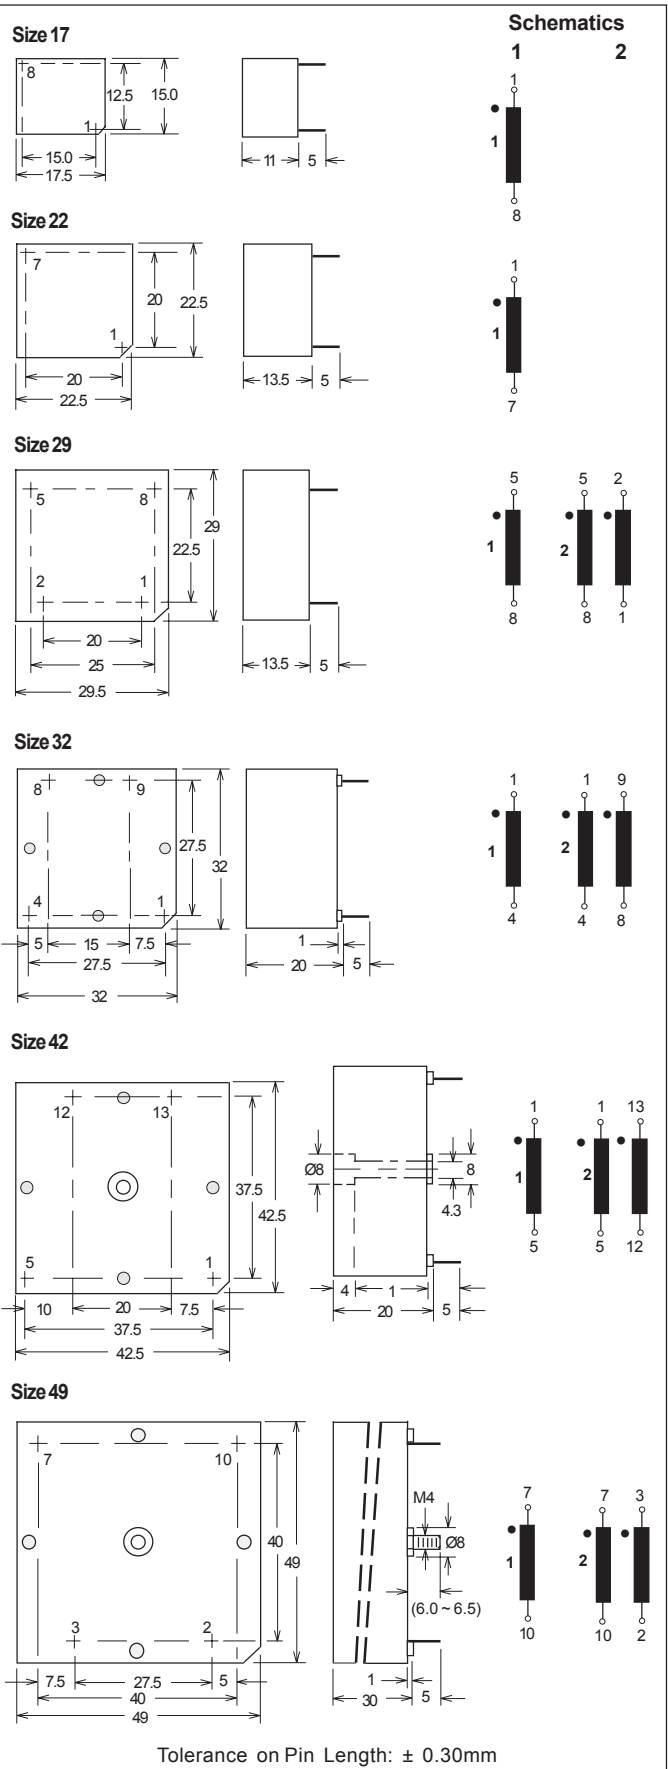

Regional Locations - Design, Manufacturing, Sales & Marketing

Talema Group Regional Offices

North America

**United States
(Sales & Marketing)**

Talema Group, LLC
 PO Box 935
 900 Innovation Drive
 Suite 120, Rolla
 Missouri 65402
 Tel: +1 573-303-3675
 E-Mail:
 sales@talemagroup.com
 Web: www.talema.com

Asia

**India
(Design, Manufacturing, Sales & Marketing)**

Administrative Office
Talema Electronic India Private Limited
 Door No. 221, 1st and 2nd Floor
 KJ Plaza, Opp.to Vidya Mandir School
 Meyanoor Main Road
 Salem - 636 004 Tamil Nadu INDIA
 Tel: +91 427 - 243 3100
 Fax: +91 427 - 243 3109
 E-Mail: talema@talemaindia.net
 Web: www.talema.com

Factory Premises
Talema Electronic India Private Limited
 Plot Nos. 30, 31 Electrical and Electronic
 Industrial Estate
 Suramangalam
 Salem - 636 005 Tamil Nadu INDIA
 Tel: +91 427 - 243 3000
 E-Mail: talema@talemaindia.net
 Web: www.talema.com

Europe

**Germany
(Design, Sales & Marketing)**

Talema Elektronik GmbH
 Sembdnerstr. 5
 82110 Germering
 Tel: +49 89 - 841 00 - 0
 Fax: +49 89 - 841 00 25
 E-Mail: info@talema.de
 Web: www.talema.com

**Ireland
(Design, Sales & Marketing)**

Nuvotem TEO
 Units W & X, Gweedore Business Park
 Derrybeg, Letterkenny, Co. Donegal
 Tel: +353 (0) 74 95 48666
 Fax: +353 (0) 74 95 48139
 E-Mail: info@nuvotem.com
 Web: www.nuvotem.com

**Czech Republic
(Design, Manufacturing, Sales & Marketing)**

NT Magnetics s.r.o.
 Chebská 27
 322 00 Plzeň
 Tel: +420 377 - 338 351
 Fax: +420 377 - 338 350
 E-Mail: talema@talema.cz
 Web: www.ntmagnetics.cz

Locations of Talema Group Regional Offices

