

SC Series • Low Profile Power Inductors

Features

- Operating frequency upto 1MHz
- High energy storage with minimum saturation
- High stability from no load to full load
- Pick and place compatible
- Designed as 1:1 Coupled Inductor (Series or Parallel) or as 1:1 Isolation Transformer
- Manufactured in an ISO 9001:2015 and ISO 14001:2015 certified Talema facility
- Meets lead free reflow level J-STD-020C
- Fully RoHS & REACH Compliant



Electrical Specifications @25°C

Test frequency: Inductance measured @10KHz / 10mV

Test Voltage between windings: 500Vrms

Operating Temperature: -40°C to +130°C




Climatic category: IEC68-1 40/130/56




Part Number	Parallel Connected					Series Connected					Energy Storage (μJ) ²
	Rated Current (I _{DC})	L _N (μH) @ I rated	L _O (μH) ±20% No Load	DCR Ohm	ET (V-μsec)	Rated Current (I _{DC})	L _N (μH) @ I rated	L _O (μH) ±20% No Load	DCR mOhm	ET (V-μsec)	
SCS-14.4-1.5	14.40	1.5	2.2	4.4	4.8	7.20	6.0	8.8	17.6	9.6	159.0
SCS-11.2-2.4	11.20	2.4	3.5	6.5	6.0	5.60	9.6	14.0	28.6	12.0	152.8
SCS-8.2-4.2	8.20	4.2	5.9	10.5	7.9	4.10	16.8	23.6	42.0	15.8	142.6
SCS-6.8-5.8	6.80	5.8	7.9	15.0	9.1	3.40	23.2	31.6	60.0	18.2	133.8
SCS-5.7-7.6	5.70	7.6	10.1	21.0	10.3	2.85	30.4	40.4	84.0	20.6	124.2
SCS-5.4-12.1	5.40	12.1	18.5	23.3	13.9	2.70	48.4	74.0	93.2	27.8	176.6
SCS-4.4-18.0	4.40	18.0	27.4	38.2	16.5	2.20	72.0	109.6	152.8	33.0	174.3
SCS-3.54-27.0	3.54	27.0	40.5	53.2	20.5	1.77	108.0	162.0	212.8	41.0	169.1
SCS-3.0-34.8	3.00	34.8	50.5	74.0	22.5	1.50	139.2	202.0	296.0	45.0	156.5

Talema's Engineering staff can assist in the design of other inductance values and sizes.

Dimensions

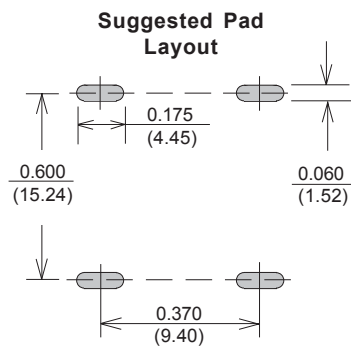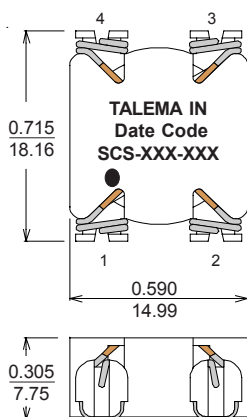

Schematic



Dimensions: Inches (Millimeters)

Tolerance: ±0.010 (0.25) unless specified otherwise

Surface Coplanarity will be <0.005 (0.13)

Regional Locations - Design, Manufacturing, Sales & Marketing
Talema Group Regional Offices
North America
**United States
(Sales & Marketing)**

Talema Group, LLC
 PO Box 935
 900 Innovation Drive
 Suite 120, Rolla
 Missouri 65402
 Tel: +1 573-303-3675
 E-Mail:
sales@talemagroup.com
 Web: www.talema.com

**Administrative Office
Talema Electronic India Private Limited**

Door No. 221, 1st and 2nd Floor
 KJ Plaza, Opp.to Vidya Mandir School
 Meyanoor Main Road
 Salem - 636 004 Tamil Nadu INDIA
 Tel: +91 427 - 243 3100
 Fax: +91 427 - 243 3109
 E-Mail: talema@talemaindia.net
 Web: www.talema.com

Asia
**India
(Design, Manufacturing, Sales & Marketing)**
Factory Premises

Talema Electronic India Private Limited
 Plot Nos. 30, 31 Electrical and Electronic
 Industrial Estate
 Suramangalam
 Salem - 636 005 Tamil Nadu INDIA
 Tel: +91 427 - 243 3000
 E-Mail: talema@talemaindia.net
 Web: www.talema.com

Europe
**Germany
(Design, Sales & Marketing)**

Talema Elektronik GmbH
 Sembdnerstr. 5
 82110 Germering
 Tel: +49 89 - 841 00 - 0
 Fax: +49 89 - 841 00 25
 E-Mail: info@talema.de
 Web: www.talema.com

**Ireland
(Design, Sales & Marketing)**

Nuvotem TEO
 Units W & X, Gweedore Business Park
 Derrybeg, Letterkenny, Co. Donegal
 Tel: +353 (0) 74 95 48666
 Fax: +353 (0) 74 95 48139
 E-Mail: info@nuvotem.com
 Web: www.nuvotem.com

**Czech Republic
(Design, Manufacturing, Sales & Marketing)**

NT Magnetics s.r.o.
 Chebská 27
 322 00 Plzeň
 Tel: +420 377 - 338 351
 Fax: +420 377 - 338 350
 E-Mail: talema@talema.cz
 Web: www.ntmagnetics.cz

Locations of Talema Group Regional Offices
