

CUJ-16 • Miniature Chip Style SMD Common Mode Filter Chokes

Features

- EMI noise suppression for data and signal line filtering
- Low cost SMD common mode chokes are designed for pick and place compatibility while providing consistent and reliable coplanarity
- High attenuation over a wide frequency range
- Manufactured in an ISO 9001:2015 and ISO 14001:2015 certified Talema facility
- Fully RoHS & REACH Compliant and meets lead free reflow level J-STD-020C



Electrical Specifications @ 25°C

Nominal Voltage: 42Vac (50/60Hz), 80Vdc

Operating Temperature: -25° to +85°C

Storage Temperature: -40° to +125°C

Climatic category: according to IEC68-1 25/85/56

Test voltage between windings: 500 Vrms



Test frequency:

Nominal Inductance: measured @ 100KHz/20mV

Leakage Inductance: measured @ 100KHz/100mV


Common Mode Chokes for Data and Signal Line EMI Noise Suppression

Part Number	Number of Data Lines	OCL (μ H) \pm 30%	I_N (mA)	DCR (mOhms)	Number of Coils	Windings per Coil	Schematic
CUJ-240-16E	4	24	800	45	2	2	E
CUJ-340-16E	4	34	700	55	2	2	E
CUJ-101-16E	4	100	450	135	2	2	E
CUJ-471-16E	4	470	450	95	2	2	E
CUJ-102-16E	4	1000	450	135	2	2	E
CUJ-472-16E	4	4700	300	310	2	2	E
CUJ-240-16C	6	24	650	45	2	3	C
CUJ-470-16C	6	47	450	90	2	3	C
CUJ-101-16C	6	100	350	170	2	3	C
CUJ-471-16C	6	470	350	95	2	3	C
CUJ-102-16C	6	1000	330	170	2	3	C
CUJ-472-16C	6	4700	200	430	2	3	C
CUJ-240-16D	6	24	600	75	3	2	D
CUJ-470-16D	6	47	500	110	3	2	D
CUJ-680-16D	6	68	450	135	3	2	D
CUJ-471-16D	6	470	350	220	3	2	D
CUJ-102-16D	6	1000	350	220	3	2	D
CUJ-472-16D	6	4700	190	750	3	2	D
CUJ-240-16A	8	24	550	45	2	4	A
CUJ-470-16A	8	47	400	90	2	4	A
CUJ-101-16A	8	100	250	240	2	4	A
CUJ-471-16A	8	470	250	95	2	4	A
CUJ-102-16A	8	1000	250	240	2	4	A
CUJ-472-16A	8	4700	160	600	2	4	A
CUJ-240-16B	8	24	430	130	4	2	B
CUJ-470-16B	8	47	360	180	4	2	B
CUJ-101-16B	8	100	300	260	4	2	B
CUJ-471-16B	8	470	300	180	4	2	B
CUJ-102-16B	8	1000	300	240	4	2	B
CUJ-472-16B	8	4700	160	1180	4	2	B


Dimensions and Impedance Curves on following page

CUJ Packaging Style and Impedance Performance


CUJ-XXX-16

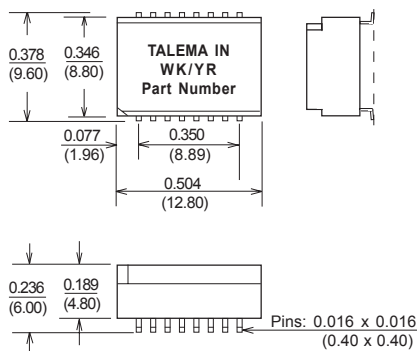

Suggested Pad Layout




Schematics

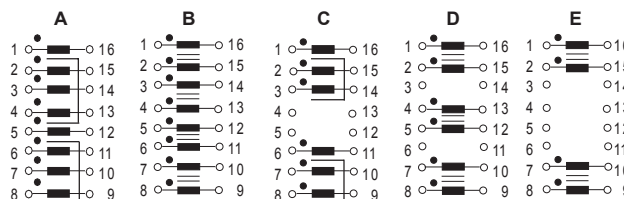


Dimensions: Inches (Millimeters)
 Tolerance: ± 0.010 (0.25) unless otherwise specified
 Surface Coplanarity will be 0.004 (0.10) maximum

Packing Method: Tape and Reel; Qty/Reel: 600 Pcs

Impedance Performance CUJ-XXX-16A Series Quadfilar Winding

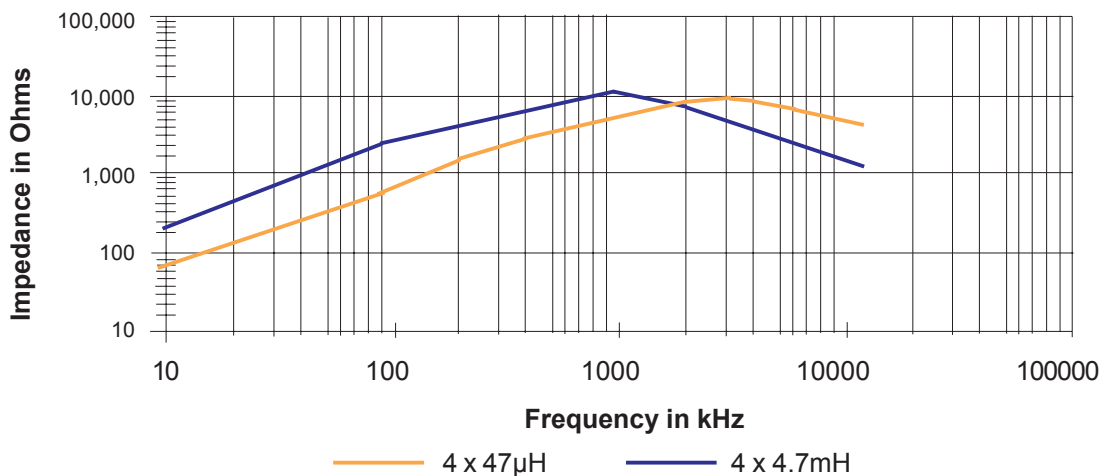

Impedance Performance CUJ-XXX-16B Series Bifilar Winding

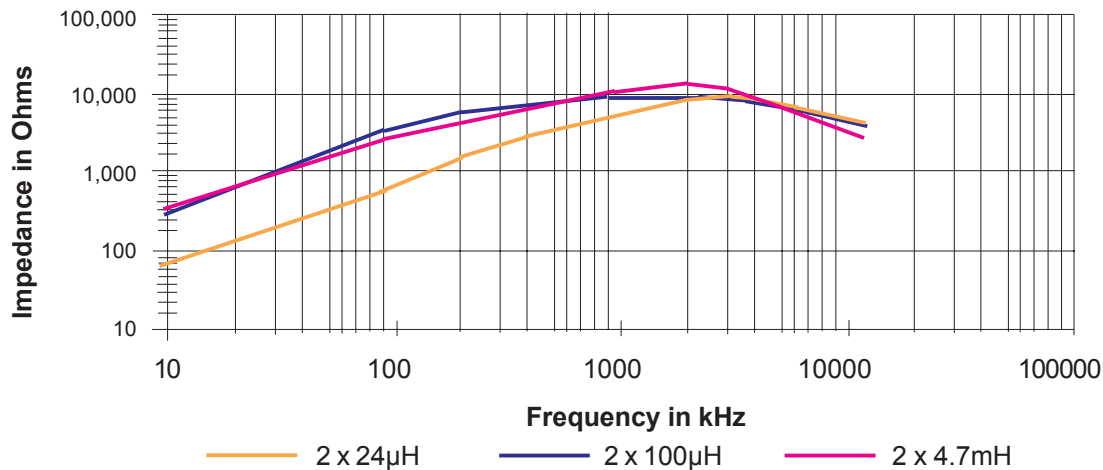

Regional Locations - Design, Manufacturing, Sales & Marketing

Talema Group Regional Offices

North America

**United States
(Sales & Marketing)**

Talema Group, LLC
 PO Box 935
 900 Innovation Drive
 Suite 120, Rolla
 Missouri 65402
 Tel: +1 573-303-3675
 E-Mail:
sales@talemagroup.com
 Web: www.talema.com

Asia

**India
(Design, Manufacturing, Sales & Marketing)**

Administrative Office
Talema Electronic India Private Limited
 Door No. 221, 1st and 2nd Floor
 KJ Plaza, Opp.to Vidya Mandir School
 Meyanoor Main Road
 Salem - 636 004 Tamil Nadu INDIA
 Tel: +91 427 - 243 3100
 Fax: +91 427 - 243 3109
 E-Mail: talema@talemaindia.net
 Web: www.talema.com

Factory Premises
Talema Electronic India Private Limited
 Plot Nos. 30, 31 Electrical and Electronic
 Industrial Estate
 Suramangalam
 Salem - 636 005 Tamil Nadu INDIA
 Tel: +91 427 - 243 3000
 E-Mail: talema@talemaindia.net
 Web: www.talema.com

Europe

**Germany
(Design, Sales & Marketing)**

Talema Elektronik GmbH
 Sembdnerstr. 5
 82110 Germering
 Tel: +49 89 - 841 00 - 0
 Fax: +49 89 - 841 00 25
 E-Mail: info@talema.de
 Web: www.talema.com

**Ireland
(Design, Sales & Marketing)**

Nuvotem TEO
 Units W & X, Gweedore Business Park
 Derrybeg, Letterkenny, Co. Donegal
 Tel: +353 (0) 74 95 48666
 Fax: +353 (0) 74 95 48139
 E-Mail: info@nuvotem.com
 Web: www.nuvotem.com

**Czech Republic
(Design, Manufacturing, Sales & Marketing)**

NT Magnetics s.r.o.
 Chebská 27
 322 00 Plzeň
 Tel: +420 377 - 338 351
 Fax: +420 377 - 338 350
 E-Mail: talema@talema.cz
 Web: www.ntmagnetics.cz

Locations of Talema Group Regional Offices

