


## Toroidal Transformer Data Sheet

### 120VA Encapsulated Style, with Leads. Dual Primaries, Dual Secondaries

High quality encapsulated toroidal transformers with dual 115V/50-60Hz primary windings. Twin secondary windings may be connected in series or parallel, or used independently

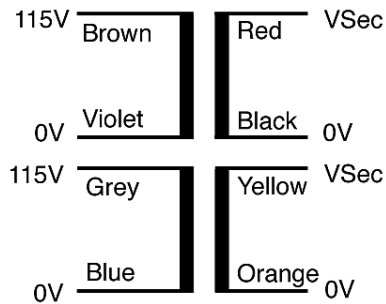

Primary 2x115V @ 50-60Hz  
Suitable for Series/Parallel connection

Secondary: 2 x Vsec @ 60VA Each  
Suitable for Series/Parallel connection



Nuvotem Part Number	Full Load Vsec [V]	Rated Current per Sec [A]	No Load Vsec [V]	DC Resistance [Ohms] @ 25°C	DEKRA Certificate
0120P2-2-012K	2 x 12	5.000	2 x 13.42	2 x 0.1336	2161054.01
0120P2-2-015K	2 x 15	4.000	2 x 16.82	2 x 0.2098	2161054.01
0120P2-2-018K	2 x 18	3.333	2 x 20.04	2 x 0.6182	2161054.01
0120P2-2-025K	2 x 25	2.400	2 x 28.02	2 x 0.6675	2161054.02

Primary Winding	Input Voltage Range :	Series: 207V–253V (230V±10%) @ 50/60Hz Parallel: 103.5V–126.5V (115V±10%) @ 50/60Hz
	DC Resistance @ 25°C =	Approx 8 Ohms each
Losses	Iron Losses	0.73 Watts approx
	Copper Losses	15.2 Watts approx
Temperature Class	Winding Wire (Primary & Secondary)	Class H (180°C)
	Insulation between input and output	Class B (130°C)
	Connection lead insulation	Class A (105°C)
Standards	Approved to UL506 & UL5085 :	File E215495
	Approved to EN61558 :	DEKRA Certificates 2161054.01 and 2161054.02 (see table above)
	Conforms to EN60065, VDE0550, BS415.	
Physical Data	Encapsulated in Black Cylindrical Case, with 6.1mm centre hole.	
	Case Diameter	104.2mm
	Case Height	52.1mm
	Approximate Weight	1.33 Kg
Terminations	Primary	Solid copper conductors (extension of winding wire), insulated over their entire length with 105°C PVC tubing. Double-insulated over entire length with 105°C PVC tubing. 150mm Long, 10mm tinned ends.
	Secondary	Solid copper conductors (extension of winding wire), insulated over their entire length with 105°C PVC tubing. 150mm Long, 10mm tinned ends.